


Luxmeter LX 50

KEY POINTS

- Easy to use
- Built-in probe
- HOLD function
- Auto shut-off: 20 minutes

FEATURES OF THE HOUSING

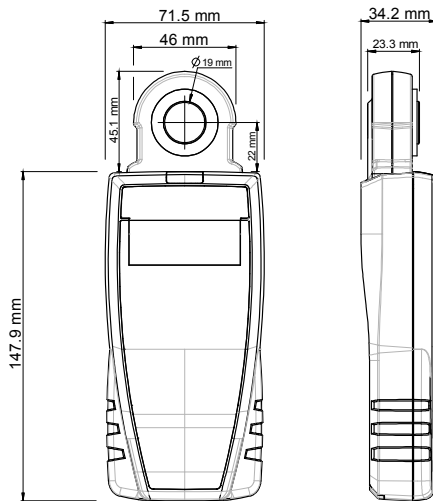

Material: ABS

Protection: IP54

Display: 2 lines, LCD technology, 50 x 36 mm.
1 line of 5 digits with 7 segments (value)
1 line of 5 digits with 16 segments (unit)

Height of digits:
Values: 9.2 mm
Units: 4.7 mm

Weight: 200 g (with batteries)



TECHNICAL FEATURES

Parameters	Light
Measuring units	lux, klux, fc
Measuring range	From 0 to 10000 lux / From 0 to 929 fc
Accuracy*	±3% of reading or ±3 lux
Resolution	From 0 to 999.9 lux: 0.1 lux / from 1000 to 10000 lux: 1 lux From 0 to 0.9999 klux: 0.0001 klux / from 1 to 10 klux: 0.001 klux From 0 to 99.99 fc: 0.01 fc / from 100 to 929 fc: 0.1 fc
Measuring element	Silicon Photodiode
Directional sensitivity (f2)**	<6%
Linearity (f3)**	<3%
Conditions of use (°C/%HR/m)	From 0 to +50°C. In non-condensation condition. From 0 to 2000 m.
Storage temperature	From -10 to +70°C
Power supply	4 batteries AAA LR03 type 1.5 V
Autonomy	20 hours
European directives	2014/30/EU EMC; 2014/35/EU Low Tension; 2011/65/EU RoHS II; 2012/19/EU WEEE

* All the accuracies indicated in this technical datasheet were stated in laboratory conditions, and can be guaranteed for measurements carried out in the same conditions, or carried out with calibration compensation
** The f2 and f3 coefficient are defined according to the French NF C 42-710 standard.

ORDER OF MAGNITUDE OF LUX ACCORDING TO APPLICATIONS

Environment	Lux	Environment	Lux
Outside with open air	500 to 25000	Factory: electronic assembling	1500 to 3000
Outside with direct sunlight	50000 to 100000	Hotel reception hall	200 to 500
Full moon night	1	Shop	750 to 1500
Overnight lit street	20 to 70	Hospital operating room	750 to 1500
Apartment well lit	200 to 400	Classroom	200 to 750

FACTOR VALUE ACCORDING TO THE LIGHT SOURCES

The following table indicates the factor value corresponding to different light sources with their examples. The device is adjusted with an incandescent standard white light source owning its own spectral response. The following lighting sources can be measured by the LX50 and have a different spectral response. Therefore, the presented coefficients in the following table enable to correct the measurement according to these different sources. The correction is carried out by multiplying the measured value by the F factor : Corrected value = F x measured value.

Source	F factor	Source	F factor
Fluorescent tube with three bands	1.346	Rare-earth metal halide lamp	1.013
High pressure mercury lamp	1.437	White led : neutral colour	1.121
Sodium vapour lamp	1.401	Halogen quartz lamp / tungsten (standard source)	1
Metal halide lamp with three additives	1.237		

SUPPLIED WITH

Instruments are supplied with an adjustment certificate and a soft case.



ACCESSORIES

- Calibration certificate
- Soft case
- Magnetic protective housing



Only the accessories supplied with the device must be used.



MAINTENANCE

We carry out calibration, adjustment and maintenance of your instruments to guarantee a constant level of quality of your measurements. As part of Quality Assurance Standards, we recommend you to carry out a yearly checking.

GUARANTEE

Instruments have 1-year guarantee for any manufacturing defect (return to our After-Sales Service required for appraisal).

PRECAUTIONS FOR USE

Please always use the device in accordance with its intended use and within parameters described in the technical features in order not to compromise the protection ensured by the device.

USE OF THE INSTRUMENT

Take a measurement

- Switch on the instrument by pressing on "On/Off/Hold".
The instrument displays its name "LX50", then the measured value.

Hold the measurement

- During measurement:*
- Press briefly on "On/Off/Hold" to hold measurement.
"Hold" appears on the screen and temperature and light measurements are fixed.
 - Press briefly on "Select" to move from one parameter to the other.
 - Press again briefly on "On/Off/Hold" to exit the Hold function.

Change the light unit

- Press briefly on "Select" up to display the light.
- Pressing longer on "Select" to change the light unit.
- Press briefly on "Select" to select the unit: lux, klx, fc.
- Pressing longer on "Select" to return to the normal measuring mode.

How to change batteries

- Remove the front part at the back of the instrument.
 - Replace used batteries by new batteries AAA LR03 1.5 V.
 - Replace the front.
- Auto shut-off: the instrument switches off if not used during 20 minutes.



Once returned to KIMO, required waste collection will be assured in the respect of the environment in accordance with European guidelines relating to WEEE.

www.kimo.fr

Distributed by :



EXPORT DEPARTMENT

Tel : + 33. 1. 60. 06. 69. 25 - Fax : + 33. 1. 60. 06. 69. 29

e-mail : export@kimo.fr