


Central unit for 4 - 24 sensors

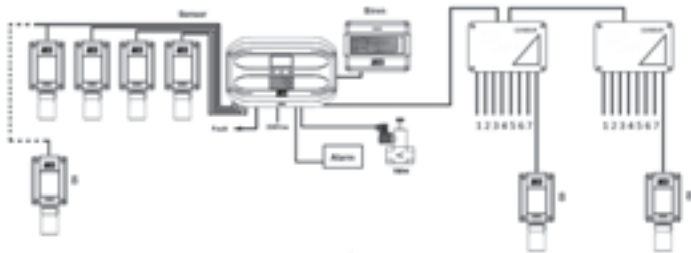

CITY – CE424P

CE IP40

Power Supply: 230Vac
 Inputs: max 24 detectors
 (4 installed expandable to 24 with n° 1 ES404 and n° 2 CE380UR)
 Logical inputs: max 1
 Output relay: max 25 (5 installed expandable to 25 with n° 1 ES414 and n° 2 CE380UR)
 Capacity replay: 3A (resistives) SPDT 230Vac
 Alarm levels: 3 programmable levels + fault, level programmable in zone
 Dimensions: 379(l)x241(h)x133(p) mm

ACCESSORIES

ES404: board with 4 input 4-20mA sensors
 ES414: board with 4 output relays
 ES380UR: Board with 4 output relays for CE380UR :
 CE380UR : Remote unit for- 8 input 4-20mA sensors
 - 8 relays with max 2
 ES415: PC output board - ModBus (RS485)

Ideal control panels for medium gas detection systems, high performances. The big RGB colour back lighted display placed on the front panel allows the actual visualization in real time of all reading values of the connected sensors. Equipped by a serial RS485 door that connect until n° 2 remote units that allow to manage 8 IN and 9 OUT in central, up to 24 detectors and 25 output relays. The intuitive keyboard allows in an intuitive way to use the control panel and the programming is facilitated by the self-driving system and by the pre-configuration of our detectors.

- Compatible to all sensors series "SE" and "TS" with output 4-20mA
- RS485 door to connect max. n° 2 CE380UR remote units
- Easy setup with pre-configured list of pre-programmed detectors
- Configuration protected by a password (3 safety levels)
- AND, OR and PARKING (DM 1/2/86 o EN50545-1) logical operation usable in zones
- "RESET" function
- Last events visualized on the display (100)
- Operation/Working visualization with backlighting display
- Clock with automatic daylight saving time
- Check inputs/outputs boards presence
- SD Card for:
 - Firmware updating
 - data logger
 - programming backup
- N° 2 batteries of 12V 1.3 Ah can be setting

