



3 zones central for with remote sensors



SE194K

The central panels are equipped with three led bars that indicate the reached gas concentration, The green led indicates fresh air, the first and second red leds indicate pollution and the third and fourth red leds indicate the switching on of the alarm relay. The yellow led indicate an anomaly of the system and it operate on the fault relay.

Type	Sensors	Output	Capacity	Sensors (max 3)
SE194K	Methane LPG	N° 3 relays 230V 3A SPDT	230Vac 3A SPDT	SE 192KM SE 192KG SE 193KM SE 193KG

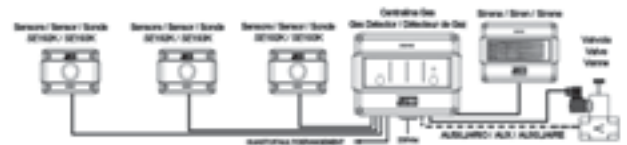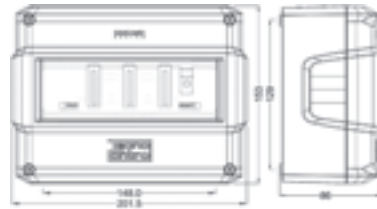

CE IP65

Power supply: 110/230Vac 50-60Hz 12Vcc - Installation: Wall

Absorption: 10 VA

Alarm level: 10% LIE - 20% LEL - Measuring range: 0÷20% LEL

N° 3 safety positive relay with alarm memory for all sensors

A led bar indicate the reached gas concentration; 1 for each sensor




SE293K

The central panel is equipped with graphic backlighted DISPLAY that indicate the reached gas concentration. It is equipped with n° 3 inputs for sensors and n° 3 relays output for alarm and fault with alarms memory. Alarm levels are programmable via DIP-switch. TEST and RESET functions.

Type	Sensors	Output	Capacity	Sensors (max 3)
SE293K	Methane LPG	N° 3 relays 230V 3A SPDT	230Vac 3A SPDT	SE 192KM SE 192KG SE 193KM SE 193KG

AVAILABLE FROM OCTOBER 2017

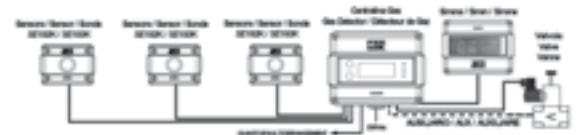

CE IP65

Power supply: 110/230Vac 50-60Hz - 24Vdc - Installation: Wall

Absorption: 15 VA

Alarm level: 10% LIE - 20% LEL - Measuring range: 0÷20% LEL

N° 3 safety positive relay with alarm memory for all sensors

Backlighted DISPLAY that indicate the reached gas concentration.